(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization

International Bureau



(43) International Publication Date 23 October 2003 (23.10.2003)

PCT

(10) International Publication Number WO 2003/086675 A3

(51) International Patent Classification7: E21B 19/16

(21) International Application Number:

PCT/US2003/006544

(22) International Filling Date: 4 March 2003 (04.03.2003)

(25) Filing Language:

Linglish

(26) Publication Language:

English

(30) Priority Data:

60/372,048

12 April 2002 (12.04.2002) US

- (71) Applicant (for all designated States except US): ENVENTURE GLOBAL TECHNOLOGY [US/US]; 16200 A Park Row, Houston, TX 77084 (US).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): COSTA, Scott

[US/US]; 2011 Willow Point, Kingwood, TX 77339 (US). HOCKADAY, Joel, Gray [US/US]; 17318 Ginger Fields Lane, Tomball, TX 77375 (US). WADDELL, Kevin, K. [US/US]; 11007 Sprucedale Court, Houston, TX 77070 (US). RING, Lev [RU/US]; 14126 Heatherhill Place, Houston, TX 77077 (US). BULLOCK, Michael [US/US]; 19827 Sky Country, Houston, TX 77094 (US). COOK, Robert Lance [US/US]; 934 Caswell Court, Katy, TX 77450 (US). KENDZIORA, Larry [US/US]; 6518 Williams School Court, Needville, TX 77461 (US). BRISCO, David, Paul [US/US]; 405 Westridge Drive, Duncan, OK 73533 (US). JACKSON, Tance [US/US]; 7209 Ridgemoor Lane, Plano, TX 75025 (US).

- (74) Agents: MATTINGLY, Todd, et al.; Haynes and Boone, LLP, 1000 Louisiana Street, Suite 4300, Houston, TX 77002-5012 (US).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GII,

[Continued on next page]

(54) Title: PROTECTIVE SLEEVE FOR THREADED CONNECTIONS FOR EXPANDABLE LINER HANGER

(57) Abstract: A tubular sleeve (1018) is coupled to and overlaps the threaded connection (1012, 1032) between a pair of adjacent tubular members (1016, 1038).

GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV. MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declaration under Rule 4.17:

of inventorship (Rule 4.17(iv)) for US only

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments
- (88) Date of publication of the international search report: 5 August 2004

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US03/06544

			21703037003 44			
A. CLASSIFICATION OF SUBJECT MATTER						
IPC(7) : E21B 19/16						
US CL : 166/380, 85.3, 309, 387, 72, 73; 285/382.7, 398						
According to International Patent Classification (IPC) or to both national classification and IPC B. FTELDS SEARCHED						
Minimum documentation searched (classification system followed by classification symbols) U.S.: 166/380, 85.3, 309, 387, 72, 73, 187, 195, 206, 207, 212, 216, 217; 285/382.7, 398, 55, 388.1						
	on searched other than minimum documentation to the	extent that such docume	ents are included	m the helds searched		
None						
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) EAST						
C. DOC	UMENTS CONSIDERED TO BE RELEVANT		····			
Category *	Citation of document, with indication, where ap		it passages	Relevant to claim No.		
Α	US 6,405,761 B1 (SHIMIZU et al) 18 June 2002, se	e entire document		1-120		
Α	US 5,971,443 A (NOEL et al) 26 October 1999, see entire document			1-120		
A	US 5,309,621 A (O'DONNELL et al) 10 May 1994, see entire document			1-120		
A	US 3,997,193 A (TSUDA et al) 14 December 1976, see entire document			i-120		
A	US 3,989,280 A (SCHWARZ) 02 November 1976, see entire document		1-120			
A	US 3,834,742 A (MCPHILLIPS) 10 September 1974, see entire document		1-120			
А	US 3,579,805 A (KAST) 25 May 1971, see entire document		I-120			
Α	US 2,647,847 A (BLACK et al) 04 August 1953, see entire document		1-120			
х	US 4,693,498 A (BLAUGH et al) 15 september 1987, see Fig. 2a and 2b.			54		
			_			
Further	documents are listed in the continuation of Box C.	See patent far	mily annex.			
• 5	special categories of cited documents:			mational filing date or priority ation but cited to understand the		
	of particular relevance "X" decument of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve on inventive step when the document is taken alone					
establish	s which may throw doubts on priority claim(s) or which is cited to the publication date of another citation or other special reason (as	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is		claimed invention cannot be		
1	combined with one or more other such documents, such combin			documents, such combination		
	l					
Date of the actual completion of the international search Date of mailing of the international search report						
30 July 2003 (30.07,2003)						
Name and mailing address of the ISA/US Mail Stop PCT, Ann: ISA/US Aptiorized officer Mail Stop PCT, Ann: ISA/US						
Mail Stop PCT, Atm: ISA/US Commissioner for Patents Roger J. Schoeppel						
P.O. Box 1450						
	Alexandria, Virginia 22313-1450 Facsimile No. (703)305-3230					
	- · ·					

Form PCT/ISA/210 (second sheet) (July 1998)

١	PCT/US03/06544

INTERNATIONAL SEARCH REPORT

C. (Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT						
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.				
X	US 6,275,556 B1 (KINNEY et al) 14 August 2001. see Fig. 3	54				
		,				

Form PCT/ISA/210 (second sheet) (July 1998)

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US03/06544

Box I Observations where certain claims were found unsearchable (Continuation of Item 1 of first sheet)				
This international report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:				
Claim Nos.: because they relate to subject matter not required to be searched by this Authority, namely:				
Claim Nos.: because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:				
3. Claim Nos.: because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).				
Box II Observations where unity of invention is lacking (Continuation of Item 2 of first sheet)				
This International Searching Authority found multiple inventions in this international application, as follows: Please See Continuation Sheet				
1. As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.				
2. As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite				
payment of any additional fee. 3. As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:				
4. No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:				
Remark on Protest The additional search fees were accompanied by the applicant's protest. No protest accompanied the payment of additional search fees.				

Form PCT/ISA/210 (continuation of first sheet(1)) (July 1998)

	PCT/US03/06544		
INTERNATIONAL SEARCH REPORT			
	<u> </u>		
·			
BOX II. OBSERVATIONS WHERE UNITY OF INVENTION IS LA			
The inventions listed as Groups I-IV do not relate to a single general inventive			
Rule 13.2, they lack the same or corresponding special technical features for the The independent claims of the Group I inventions all require the radial-plastic of the Group I inventions are required to the radial-plastic of the Invention I inventions are required to the radial-plastic of the Invention I	te formation of a jointed tubular connection whereas the		
independent claims of Group II inventions make no such requirement. Group I	II claims differ in that the independent claims require		
the radial-plastic deformation of the tubular connections in a method and/or app	paratus used in extracting geothermal energy from a		
geothermal well whereas the Group IV invention makes no such deformation re	equirement. The Group I and II claims further differ in		
requiring tubular connections involving internal or external tubular threads with ends. The independent claims of Groups III and IV all require their use as a lin	ner in the completion of a well to be used in extracting		
geothermal energy.			
This application contains the following inventions or groups of inventions which	th are not so linked as to form a single general		
inventive concept under PCT Rule 13.1. In order for all inventions to be exam	med, the appropriate auditional examination rees must		
be paid.			
Group I, claim(s) 1-53, drawn to a "Method."			
Group II, claim(s) 54-110, drawn to an "Apparatus."			
Group III, claim(s) 111-119, drawn to a "Method and Apparatus for Extracting	Geothermal Energy."		
1.			
Group IV, claim(s) 120, drawn to an "Apparatus for Extracting Geothermal Er	ici gy.		
•			
·			

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization International Bureau



(43) International Publication Date 23 October 2003 (23.10.2003)

PCT

(10) International Publication Number WO 2003/086675 A3

(51) International Patent Classification7:

E21B 19/16

(21) International Application Number:

PCT/US2003/006544

(22) International Filing Date: 4 March 2003 (04.03.2003)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

60/372,048

12 April 2002 (12.04.2002) US


- (71) Applicant (for all designated States except US): ENVEN-TURE GLOBAL TECHNOLOGY [US/US]: 16200 A Park Row, Houston, TX 77084 (US).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): COSTA, Scott

[US/US]; 2011 Willow Point, Kingwood, TX 77339 (US). HOCKADAY, Joel, Gray [US/US]; 17318 Ginger Fields Lane, Tomball, TX 77375 (US). WADDELL, Kevin, K. [US/US]; 11007 Sprucedale Court. Houston, TX 77070 (US). RING, Lev [RU/US]; 14126 Heatherhill Place, Houston, TX 77077 (US). BULLOCK, Michael [US/US]; 19827 Sky Country, Houston, TX 77094 (US). COOK, Robert Lance [US/US]; 934 Caswell Court, Katy, TX 77450 (US). KENDZIORA, Larry [US/US]; 6518 Williams School Court, Needville, TX 77461 (US). BRISCO, David, Paul [US/US]; 405 Westridge Drive, Duncan, OK 73533 (US). JACKSON, Tance [US/US]; 7209 Ridgemoor Lane, Plano, TX 75025 (US).

- (74) Agents: MATTINGLY, Todd et al.; Haynes and Boone, LLP, 901 Main Street, Suite 3100, Dallas, TX 75202-3789
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,

[Continued on next page]

(54) Title: PROTECTIVE SLEEVE FOR THREADED CONNECTIONS FOR EXPANDABLE LINER HANGER

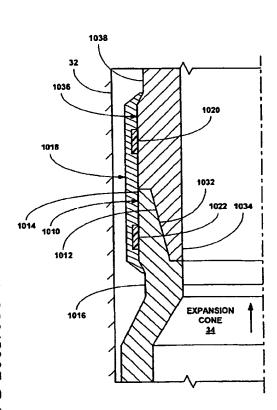

(57) Abstract: A tubular sleeve (1018) is coupled to and overlaps the threaded connection (1012, 1032) between a pair of adjacent tubular members (1016, 1038).

GM, IIR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH. PL, PT, RO, RU, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, Cl, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declaration under Rule 4.17:

of inventorship (Rule 4.17(iv)) for US only

Published:

- with international search report
- with amended claims
- (88) Date of publication of the international search report: 5 August 2004

Date of publication of the amended claims: 29 December 2004

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

AMENDED CLAIMS

[received by the International Bureau on 06 August 2004 (06.08.04); new claims 121-153 added; remaining claims unchanged (7 pages)]

- a first tubular member received within an end of the tubular sleeve in abutment with the internal flange that comprises internal threads; and
- a second tubular member received within another end of the tubular sleeve in abutment with the internal flange that comprises external threads that engage the internal threads of the first tubular member.
- 120. An apparatus for extracting geothermal energy from a subterranean source of geothermal energy, comprising:
- a borehole that traverses the subterranean source of geothermal energy;
- a first casing string positioned within the borehole; and
- a second casing string positioned within the borehole that traverses the subterranean source of geothermal energy that overlaps with the first casing string;

wherein the interior diameter of a passage defined by the first and second casing strings is constant;

wherein at least one of the first and second casing strings comprise:

- a tubular sleeve comprising an external flange positioned between the ends of the tubular sleeve;
- a first tubular member that receives an end of the tubular sleeve that abuts external flange that comprises internal threads; and
- a second tubular member that receives another end of the tubular sleeve that abuts the external flange that comprises external threads that engage the internal threads of the first tubular member.
- 121. A method of radially expanding and plastically deforming a first tubular member and a second tubular member, comprising:

coupling an end of the first tubular member with an end of a tubular sleeve; coupling an end of the second tubular member with another end of the tubular sleeve; placing the tubular members within a wellbore; and

- displacing an expansion device through the interiors of the first and second tubular members to radially expand and plastically deform portions of the first and second tubular members.
- 122. The method of claim 121, wherein the ends of the first and second tubular members are received within the ends of the tubular sleeve.
- 123. The method of claim 121, wherein the ends of the first and second tubular members receive the ends of the tubular sleeve.
- 124. The method of claim 121, wherein, before, during, and after the radial expansion of the portions of the first and second tubular members, a fluid tight seal is provided by the interface between the tubular sleeve and the ends of the first and second tubular members.
- 125. A method of radially expanding and plastically deforming a first tubular member and a second tubular member, comprising:

coupling an end of the first tubular member with an end of a tubular sleeve;

coupling an end of the second tubular member with another end of the tubular sleeve; and displacing an expansion device through the interiors of the first and second tubular members to radially expand and plastically deform portions of the first and second tubular members; wherein, before, during, and after the radial expansion of the portions of the first and second tubular members, a fluid tight scal is provided by the interface between the tubular sleeve and the ends of the first and second tubular members.

- 126. The method of claim 125, wherein the ends of the first and second tubular members are received within the ends of the tubular sleeve.
- 127. The method of claim 125, wherein the ends of the first and second tubular members receive the ends of the tubular sleeve.
- 128. The method of claim 125, further comprising:

placing the tubular members within a wellbore; and

then displacing an expansion device through the interiors of the first and second tubular members to radially expand and plastically deform portions of the first and second tubular members.

- 129. An apparatus, comprising:
- a tubular sleeve;
- a first tribular member coupled to an end of the tubular sleeve comprising internal threads at an end portion; and
- a second tubular member coupled to another end of the tubular sleeve comprising external threads at an end portion that engage the internal threads of the end portion of the first tubular member; wherein the tubular sleeve is in circumferential tension;
- wherein the end portion of the first tubular member is in circumferential compression; and wherein the end portion of the second tubular member is in circumferential compression.
- 130. An apparatus, comprising:
- a tubular sleeve;
- a first tubular member coupled to an end of the tubular sleeve comprising internal threads at an end portion; and
- a second tubular member coupled to another end of the tubular sleeve comprising external threads at an end portion that engage the internal threads of the end portion of the first tubular member; wherein the tubular sleeve is in circumferential compression;

wherein the end portion of the first tubular member is in circumferential tension; and wherein the end portion of the second tubular member is in circumferential tension.

- 131. An apparatus, comprising:
- a tubular sleeve;
- a first tubular member coupled to an end of the tubular sleeve comprising internal threads at an end portion; and

a second tubular member coupled to another end of the tubular sleeve comprising external threads at an end portion that engage the internal threads of the end portion of the first tubular member; wherein the tubular sleeve comprises an internal flange.

- 132. An apparatus, comprising:
- a tubular sleeve;
- a first tubular member coupled to an end of the tubular sleeve comprising internal threads at an end portion; and
- a second tubular member coupled to another end of the tubular sleeve comprising external threads at an end portion that engage the internal threads of the end portion of the first tubular member; wherein the tubular sleeve comprises an external flange.
- 133. An apparatus, comprising:
- a tubular sleeve;
- a first tubular member coupled to an end of the tubular sleeve comprising internal threads at an end portion; and
- a second tubular member coupled to another end of the tubular sleeve comprising external threads at an end portion that engage the internal threads of the end portion of the first tubular member;
- wherein the tubular sleeve further comprises one or more scaling members for scaling the interface between the tubular sleeve and at least one of the tubular members.
- 134. An apparatus, comprising:
- a tubular sleeve;
- a first tubular member coupled to an end of the tubular sleeve comprising internal threads at an end portion;
- a second tubular member coupled to another end of the tubular sleeve comprising external threads at an end portion that engage the internal threads of the end portion of the first tubular member;
- a retaining ring positioned between the end of the first tubular member and the end of the tubular sleeve.
- 135. An apparatus, comprising:
- a tubular sleeve;
- a first tubular member coupled to an end of the tubular sleeve comprising internal threads at an end portion;
- a second tubular member coupled to another end of the tubular sleeve comprising external threads at an end portion that engage the internal threads of the end portion of the first tubular member; and
- a retaining ring positioned between the end of the first tubular member and the other end of the tubular sleeve.

- 136. An apparatus, comprising:
- a tubular sleeve;
- a first tubular member coupled to an end of the tubular sleeve comprising internal threads at an end portion; and
- a second tubular member coupled to another end of the tubular sleeve comprising external threads at an end portion that engage the internal threads of the end portion of the first tubular member; wherein the end of the tubular sleeve is deformed onto the end of the first tubular member.
- 137. An apparatus, comprising.
- a tubular sleeve;
- a first tubular member coupled to an end of the tubular sleeve comprising internal threads at an end portion; and
- a second tubular member coupled to another end of the tubular sleeve comprising external threads at an end portion that engage the internal threads of the end portion of the first tubular member; wherein the other end of the tubular sleeve is deformed onto the end of the second tubular member.
- 138. An apparatus, comprising:
- a tubular sleeve;
- a first tubular member coupled to an end of the tubular sleeve comprising internal threads at an end portion;
- a second tubular member coupled to another end of the tubular sleeve comprising external threads at an end portion that engage the internal threads of the end portion of the first tubular member; and
- a retaining ring coupled to the end of the first tubular member for retaining the tubular sleeve onto the end of the first tubular member.
- 139. An apparatus, comprising:
- a tubular sleeve;
- a first tubular member coupled to an end of the tubular sleeve comprising internal threads at an end portion;
- a second tubular member coupled to another end of the tubular sleeve comprising external threads at an end portion that engage the internal threads of the end portion of the first tubular member;
- a retaining ring coupled to the end of the second tubular member for retaining the other end of the tubular sleeve onto the end of the second tubular member.
- 140. An apparatus, comprising:
- a tubular sleeve;
- a first tubular member coupled to an end of the tubular sleeve comprising internal threads at an end portion;

a second tubular member coupled to another end of the tubular sleeve comprising external threads at an end portion that engage the internal threads of the end portion of the first tubular member; and

- a locking ring for coupling the end of the first tubular member to the end of the tubular sleeve.
- 141. An apparatus, comprising:
- a tubular sloeve;
- a first tubular member coupled to an end of the tubular sleeve comprising internal threads at an end portion;
- a second tubular member coupled to another end of the tubular sleeve comprising external threads at an end portion that engage the internal threads of the end portion of the first tubular member; and
- a locking ring for coupling the end of the second tubular member to the other end of the tubular sleeve.
- 142. An apparatus, comprising:
- a tubular sleeve;
- a first tubular member coupled to an end of the tubular sleeve comprising internal threads at an end portion;
- a second tubular member coupled to another end of the tubular sleeve comprising external threads at an end portion that engage the internal threads of the end portion of the first tubular member; and
- a structure for receiving the first and second tubular members and the tubular sleeve; wherein the tubular sleeve contacts the interior surface of the structure.
- 143. An apparatus, comprising:
- a tubular sleeve;
- a first tubular member coupled to an end of the tubular sleeve comprising internal threads at an end portion; and
- a second tubular member coupled to another end of the tubular sleeve comprising external threads at an end portion that engage the internal threads of the end portion of the first tubular member;
- wherein the tubular sleeve further comprises a scaling element coupled to the exterior surface of the tubular sleeve.
- 144. An apparatus, comprising:
- a tubular sleeve;
- a first tubular member coupled to an end of the tubular sleeve comprising internal threads at an end portion; and
- a second tubular member coupled to another end of the tubular sleeve comprising external threads at an end portion that engage the internal threads of the end portion of the first tubular member;

wherein the tubular sleeve is metallic.

- 145. An apparatus, comprising:
- a tubular sleeve;
- a first tubular member coupled to an end of the tubular sleeve comprising internal threads at an end portion; and
- a second tubular member coupled to another end of the tubular sleeve comprising external threads at an end portion that engage the internal threads of the end portion of the first tubular member; wherein the tubular sleeve is non-metallic.
- 146. An apparatus, comprising:
- a tubular sleeve;
- a first tubular member coupled to an end of the tubular sleeve comprising internal threads at an end portion; and
- a second tubular member coupled to another end of the tubular sleeve comprising external threads at an end portion that engage the internal threads of the end portion of the first tubular member; wherein the tubular sleeve is plastic.
- 147. An apparatus, comprising:
- a tubular sleeve;
- a first tubular member coupled to an end of the tubular sleeve comprising internal threads at an end portion; and
- a second tubular member coupled to another end of the tubular sleeve comprising external threads at an end portion that engage the internal threads of the end portion of the first tubular member; wherein the tubular sleeve is ceramic.
- 148. An apparatus, comprising:
- a tubular sleeve;
- a first tubular member coupled to an end of the tubular sleeve comprising internal threads at an end portion; and
- a second tubular member coupled to another end of the tubular sleeve comprising external threads at an end portion that engage the internal threads of the end portion of the first tubular member, wherein the tubular sleeve is frangible.
- 149. An apparatus, comprising:
- a tubular sleeve;
- a first tubular member coupled to an end of the tubular sleeve comprising internal threads at an end portion; and
- a second tubular member coupled to another end of the tubular sleeve comprising external threads at an end portion that engage the internal threads of the end portion of the first tubular member; wherein the tubular sleeve comprises one or more longitudinal slots.

- 150. An apparatus, comprising:
- a tubular sleeve;
- a first tubular member coupled to an end of the tubular sleeve comprising internal threads at an end portion; and
- a second tubular member coupled to another end of the tubular sleeve comprising external threads at an end portion that engage the internal threads of the end portion of the first tubular member; wherein the tubular sleeve comprises one or more radial passages.
- 151. An apparatus, comprising:
- a tubular sleeve;
- a first tubular member coupled to an end of the tubular sleeve comprising internal threads at an end portion; and
- a second tubular member coupled to another end of the tubular sleeve comprising external threads at an end portion that engage the internal threads of the end portion of the first tubular member; wherein the first and second tubular members are amorphously bonded.
- 152. An apparatus, comprising:
- a tubular sleeve;
- a first tubular member coupled to an end of the tubular sleeve comprising internal threads at an end portion; and
- a second tubular member coupled to another end of the tubular sleeve comprising external threads at an end portion that engage the internal threads of the end portion of the first tubular member; wherein the first and second tubular members are welded.
- 153. An apparatus, comprising:
- a tubular sleeve;
- a first tubular member coupled to an end of the tubular sleeve comprising internal threads at an end portion; and
- a second tubular member coupled to another end of the tubular sleeve comprising external threads at an end portion that engage the internal threads of the end portion of the first tubular member;
- wherein the internal threads of the first tubular member and the internal threads of the second tubular member together provide a fluid tight seal.